

All-in-one solution

for a stable and rut-free gravel surface



Weed-resistant

The high-quality weed control membrane prevents weed growth from the underside



Quick processing

Can be easily cut to size, with a bottom layer of weed control membrane already integrated



Very strong

The hexagonal cell structure can withstand very heavy loads. EuroGravel is currently the strongest gravel stabilization system available on the market



Easy to install

The grids can be easily laid out and installed. The gravel grids do not use a special connection system, so they are very easy to install



Water permeable

The gravel grids and the weed control membrane are permeable to water



Recyclable

The membrane is attached with a glue free system and is made of the same material as the gravel grid

► Gravel stabilization grids with weed control membrane for all types of gravel and chippings


EuroGravel[®]
innovative basis for gravel and chippings

Choose a rut-free and easily walkable gravel surface

EuroGravel gravel stabilization grids make it very easy to lay down a uniform and rut-free gravel surface. The result is an extremely stable and load-resistant surface that is not susceptible to deformation or rutting. The weed control membrane on the bottom side prevents the growth of weeds from the underside. It's the perfect all-in-one solution for small decorative gardens as well as driveways, large car parks, golf courses, campsites etc.



The research institute TNO did a test that proves the EuroGravel stabilization grids can be loaded with very high loads.

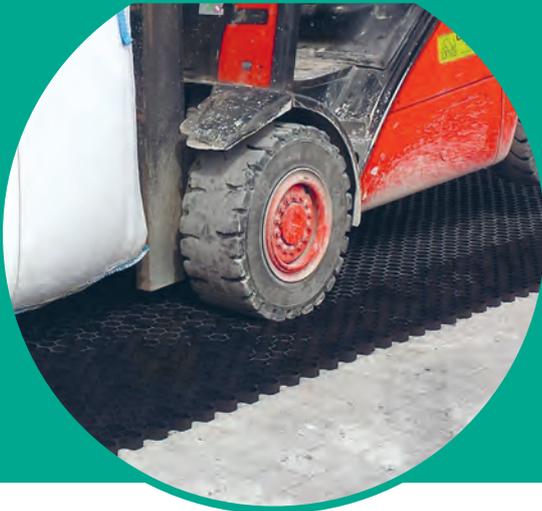

Very high load resistance

The EuroGravel gravel stabilization system can withstand very high loads and is therefore ideal for surfaces subjected to such high loads. A properly installed and stable foundation is very important in this regard.


Test	Maximum permissible load:
Empty panel	> 484 psi
Filled panel	> 16899 psi

Freeze thaw resistant

Conform NEN-EN-1338, no noticeable damage. It would be advisable, however, to install and cover the product within 2 weeks of removing the shrink sleeves.

Specifications

Panel dimensions	46.9" x 30.7" x 1.2"
Cell diameter	2.04"
Cell wall thickness	below: 0.16" above: 0.12"
Panels per square yard	1.02
Square Yard per panel	1.11 yd ²
Weight per panel	6.7 lb
Gravel/chippings consumption	±±approx. 1.78 lb/ft ²
Available colours	black and white
Gravel size	Min. 1/8", max. 1"
Chipping size	Min. 1/8", max. 3/4"
Weight of weed control membrane	2.65 oz/yd ²
Water permeability of weed control membrane	5.2 gpm/ft ² (conform EN-ISO-11058)
Tensile strength of weed control membrane (CMD/MD)	5900 lb/ft (conform EN-ISO-10319)

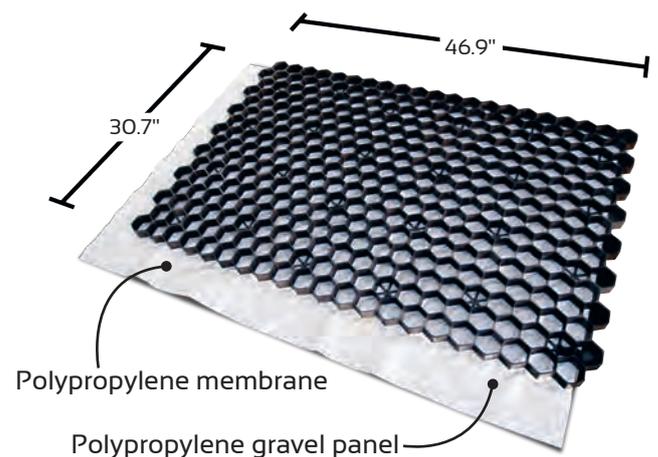

Your EuroGravel dealer:

